

12

EUROPEAN PATENT APPLICATION

21 Application number: 86830260.5

22 Date of filing: 24.09.86

51 Int. Cl.: **E 02 F 9/12, E 02 F 9/22,**
E 02 F 3/30, E 02 F 3/32,
F 15 B 11/05

30 Priority: 04.02.86 IT 6708686

43 Date of publication of application: 19.08.87
Bulletin 87/34

84 Designated Contracting States: **AT BE CH DE FR GB IT LI**
LU NL SE

71 Applicant: **CHS VICKERS S.p.A., Strada Statale 460,**
Km 36 Regione San Martino, I-10087 Valperga (Torino)
(IT)


72 Inventor: **Tha, Piero, Via Gioberti 2, I-10087 Valperga**
(Torino) (IT)

74 Representative: **Buzzi, Franco et al, c/o**
Jacobaccl-Casetta & Perani S.p.A. Via Alfieri, 17,
I-10121 Torino (IT)

54 **Hydraulic control system for working members of earth-moving machines with centralized braking of the actuators.**

57 Hydraulic control circuit for working members of earth-moving machines including linear and rotary hydraulic actuators (1, 2) associated with respective hydraulic distributors (5, 6) for the operation of respective working members. The rotary hydraulic actuators (2) with their distributors (6) are grouped in a circuit separate from the linear hydraulic actuators and are

provided with braking valve (14) means constituted by a single counterbalance valve connected in a common discharge line (15), the opening of which is controlled by a pilot pressure signal corresponding to the lowest supply pressure for the rotary actuators (2).

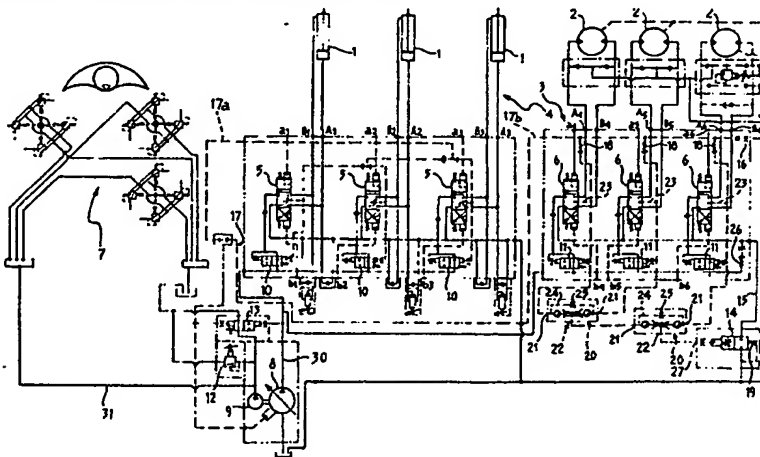

ACTORUM AG

EP 0 232 683 A1

BEST AVAILABLE COPY

Hydraulic control circuit for working members of
earth-moving machines with centralised braking of the
actuators

The present invention relates in general to hydraulic control circuits for working members of earth-moving machines.

More particularly, the invention relates to a hydraulic
5 control circuit of the type including a supply of
pressurised hydraulic fluid and a plurality of
hydraulic actuators, some linear and some rotary, for
operating respective working members, each of which is
associated with a respective spool-type hydraulic
10 distributor which can be set, with continuous
regulation, by respective pilot means in three
positions corresponding to movement in a first
direction, stoppage, and movement of the working member
in a second direction opposite the first, and
15 load-sensing pressure compensation means associated
with the supply and the distributors for keeping the
difference between the pressure supplied by the supply
and the pressure of the working members substantially
constant, and in which the rotary hydraulic actuators
20 are associated with braking valve means piloted by the
supply pressure of the rotary actuators and arranged to
vary their discharge resistance as a function of the
supply pressure.

Conventionally, in hydraulic control circuits of the
25 aforesaid type, the braking valve means for the rotary
hydraulic actuators are constituted by a plurality of
counterbalance valves of the over-centre type, each

associated with a respective rotary actuator.

The solution is relatively complicated and expensive precisely because of the use of a counterbalance valve for each rotary actuator.

- 5 The object of the present invention is to avoid this disadvantage and provide a hydraulic control circuit of the type specified above which is simpler and cheaper to make and at the same time is highly efficient.

10 In order to achieve this object, the present invention provides a hydraulic control circuit of the type defined at the beginning, characterised in that the rotary hydraulic actuators and their distributors are grouped in a circuit separate from the linear hydraulic actuators and have a common discharge line, and in that
15 the braking valve means include a single normally-closed counterbalance valve connected in the common discharge line, the opening of which is controlled by a pilot pressure signal corresponding to the lowest supply pressure for the rotary actuators.

20 Clearly, the dimensions of the common discharge line are such that it can withstand the maximum operating pressure of the circuit. The counterbalance valve, which is normally closed by a control spring, opens whenever the pressure delivered to the rotary actuators
25 is greater than the calibrated value of the spring. In such a case, the valve allows the return of the hydraulic fluid from the actuators to the fluid reservoir. Whenever cavitation (or in any case a pressure less than the calibration threshold) is

established in the delivery line to the rotary actuators in the presence of pulling rather than resisting torques acting on the actuators, the counterbalance valve returns towards the closed
5 position to reduce the discharge area and hence the speed of rotation of the actuators.

According to a first embodiment of the invention, the pressure signal for commanding the opening of the counterbalance valve is directed to it through a logic
10 system of selector valves. This logic system of selector valves comprises a series of low-pass selector valves, each having two inlets connected one to the load-sensing pressure signal of the distributor of one of the rotary actuators and the other to the
15 load-sensing pressure signal of the distributor of another of the actuators or to the output of the previous selector valve, the two inlets of each of the selector valves being connected by a communicating passage provided with a calibrated choke.

20 Whenever one of the rotary actuators is stopped and its load-sensing pressure signal is therefore almost zero, the presence of the communicating passage avoids the sending of a zero pressure signal to the counterbalance valve by the corresponding low-pass selector valve. In
25 effect, in this event, the communicating passage provides a pressure signal which, by virtue of the presence of the calibrated choke, does not in any case influence the effective pressure signal from the hydraulic actuator when it starts operating again.

30 According to one variant, the pilot pressure signal

for commanding the opening of the counterbalance valve is directed to it from a supply of pressurized hydraulic fluid through a depressurising unit connected, in parallel with the counterbalance valve, with the load-sensing pressure signals of the distributors of the actuators through respective non-return valves.

In this case, the supply of pressurised hydraulic fluid is conveniently constituted by an auxiliary supply pump for the servo-controls for operating the distributors, the auxiliary pump being connected to the depressurising unit through a calibrated orifice and a non-return valve.

The invention will now be described in detail with reference to the appended drawings, provided purely by way of non-limiting example, in which:

Figure 1 is a schematic diagram of a hydraulic control circuit according to the invention, and

Figure 2 illustrates a first variant of Figure 1 and

Figure 3 illustrates a second variant of Figure 1.

In Figure 1, the essential components of a hydraulic control circuit for the working members of an earth-moving machine are illustrated diagrammatically. In the embodiment illustrated, these working members include a series of linear hydraulic actuators for operating the digger arm (positioning-raising-penetrating-digging-overturning), and a series of

rotary hydraulic motors 2 for the translational movements of the excavator and rotation of the digger arm.

As can be seen, the rotary motors 2, of which there are three in the embodiment illustrated, are combined in a group, generally indicated 3, which is distinct and separate from the group, indicated 4, of linear actuators 1.

Respective supply and discharge distributors 5, 6 for the actuators 1 and 2 are connected to the two groups 4, 3 respectively. Each distributor 5,6 can be set in three conditions corresponding respectively to movement in a first direction, stoppage, and movement in a second direction opposite the first, of the respective actuator 1,2. The input-output connections between the distributors 5,6 and their actuators 1,2 are indicated in the drawing by $A_1, B_1 \dots A_6, B_6$.

The setting of the spools of the distributors 5, 6 in the three possible conditions is achieved by virtue of the hydraulic piloting effected by a servo-control valve unit, generally indicated 7, including, in known manner, a series of lever and pedal controls which can be moved manually into different positions corresponding to the said conditions of distributors 5,6. The output-input pilot connections between the servo-controls 7 and the distributors 5, 6 are indicated $a_1, b_1 \dots a_6, b_6$.

The supply of the distributors 5,6 (and hence the working members 1,2) and of the servo-controls 7 is

achieved, in the example illustrated, by means of two separate hydraulic pumps 8,9, through respective delivery lines 30, 31.

5 The pump 8 has a control of known load-sensor type achieved through a control circuit 17 including a line 17a associated with the group 4 in a conventional manner and a line 17b associated with the group 3 and including selector valves 18 constituted, in effect, by simple non-return ball valves connected in
10 correspondence with signal outlets 23, by means of which there is derived a load-sensing pressure signal greater than that coming from the distributor 6 in operation.

The distributors 5,6 have respective
15 associated compensators 10, 11 constituted by control valves which, in known manner, have the function of keeping the difference between the pressure supplied by the pump 8 and that of the working members 1, 2 substantially constant in use, so as to ensure the
20 simultaneity of the various possible working movements of the machine whatever the loads controlled.

The hydraulic servo-control devices 7 are supplied by the pump 9 under the control of a maximum pressure valve 12. This maximum pressure valve has an
25 associated valve 13 the function of which is to prevent saturation of the hydraulic circuit. The manner in which the valve 13 operates is described and illustrated in European Patent Application No. 85830286.2 of which the Applicants are co-applicants.

The rotary hydraulic motors 2 have associated braking valve means piloted by the pressure in the supply line for these motors 2 and arranged to vary the discharge resistance of the motors themselves in dependence on the pressure existing in the supply line. In practice these braking valve means have the function of braking the hydraulic motors 2 in such a manner that the number of revolutions of the motors themselves is independent of the load applied thereto and is instead controlled solely by the flow of fluid at the input to the motors.

According to the invention, these braking valve means are constituted by a single centralised counterbalancing valve 14 constituted by a normally-closed, directional, two-way control valve which is connected in a common discharge line 15 for the three distributors 6. Clearly, this common discharge line 15 is of such dimensions as to withstand the maximum operating pressure of the system and the spools of the distributors 6 are not connected to this line 15 in the neutral position, but the depressurising of the load-sensing signal occurs through a common bleed-off choke 16 located in parallel with the non-return valves 18 through which the load-sensing control signals are sent from the distributor 6 to the pump 8 through the line 17b.

As stated, the counterbalancing valve 14 is normally closed under the action of a control spring 19 and is subject to the action of a piloting pressure from a logic system of selector valves 20 and corresponding to the lowest supply pressure for the rotary motors 2. In effect, this logic system includes, in the example

illustrated, two selector valves of the low-pass type each having two inputs 21 and an output 22. The two inputs 21 of the first valve 20 are connected to the outlets 23 for the load-sensing pressure signals of the distributor 6 associated with two of the rotary motors 2, while the two inputs 21 of the second valve 20 are connected one to the output 22 of the first valve 20 and the other to the outlet 23 for the load-sensing pressure signal of the third rotary motor 2.

10 The output 22 of the second valve 20 is connected to the pilot input 27 of the valve 14.

Each of the low-pass selector valves 20 has a communicating passage 24 which interconnects the respective inputs 21 and in which there is connected a calibrated choke 25.

The counterbalancing valve 14 has an associated recycling system for directing a flow of fluid from the discharge line 15 to the input of the compensation valve 11, and hence to the delivery of the distributor 6, when the counter-pressure generated by the valve 14 is greater than the pressure existing in the delivery to the distributor 6. In practice, the system includes a non-return valve 26 which is inserted between the common discharge line 15 and the supply for the compensation valves 11 and, to advantage, enables the operating inertias of the counterbalance valve 14 to be reduced so as to stabilize the braking action.

Alternatively, the recycling system could be achieved in the manner illustrated in Figure 2 (in which parts

identical to or similar to those described with reference to Figure 1 are indicated by the same reference numerals) by connection of the discharge line 15 to the passage 28 through a choke 29.

- 5 In operation, when the delivery pressure to the motors 2 is greater than the calibration value of the spring 19, the counterbalancing valve 14 opens to allow the oil returning from the motors 2 to flow to the reservoir through the common discharge line 15.
- 10 Whenever cavitation (or at least a pressure below the calibration threshold) is established in the delivery line to the motors 2 in the presence of pulling rather than resisting torques acting on these motors 2, the valve 14 moves to the closed position to reduce the
- 15 discharge area and hence the speed of the motors 2. In this situation, the recycle flow achieved through the valve 26 enables the reduction of the operating inertia of the valve 14 and hence the stabilization of the braking action, as stated.
- 20 The presence of the logic system of selector valves 20 enables the counterbalancing valve 14 to operate even when only one motor is cavitating. In practice, the valve 14 prevents this cavitation and its effect on the other motor 2 consists of a simple increase in the
- 25 delivery pressure while the working torque remains constant.

Whenever one of the motors 2 is stopped (an almost zero load) and the respective pressure signal is substantially equal to zero, the communicating passages

30 24 enable the pressurisation of the line of the

stopped motor, thus directing a pressure signal other than zero to the valve 14. Because of the presence of the calibrated choke 25, this pressure signal obtained through the passage 24 does not influence the pressure
5 signal of the motor when it starts to operate normally again.

As an alternative to the logic system of selector valves 20, the pilot pressure signal for the counterbalancing valve 14 may be obtained in the manner
10 illustrated in the variant of Figure 3. In this variant, in which parts identical or similar to those described previously are indicated by the same reference numerals, the pilot pressure for the counterbalancing valve 14 is taken from the auxiliary
15 pump 9 which supplies the servo-controls 7. In effect, hydraulic fluid supplied by the pump 9 through the line 31 at a low rate of flow reaches a pressurising block 32 including a passage 33 connected at one side to the passage 31 through a calibrated orifice 36 and a
20 non-return valve 37 and at the other side to the pilot section of the counterbalancing valve 14. The pressurising unit 32 also includes a line 34 connected in parallel with the line 33 and connected through two pairs of non-return valves 35 to the load-sensing
25 pressure signal outlets 23 of the distributors 6 of the three rotary actuators 2.

By means of the non-return selector valves 18 for the load-sensing signal, the pressure input to the pressurising unit 32 is connected (with the
30 distributors 6 in the neutral position) to discharge through the bleed-off choke 16.

In operation, the pressure output by the pressurising unit 32 is such as to keep the counterbalancing valve 14 in the normally-open position against the action of the spring 19.

- 5 On operation of one or more of the distributors 6, the load-sensing pressure which is sent through the line 17b causes the closure of the non-return valves 18 associated with the distributors 6 which remain in the neutral position. The two pairs of non-return valves
10 35 enable the pressurised fluid flow supplied by the auxiliary pump 9 to the pressurising unit 32 through the choke 36 to pressurise the line 33 and keep the counterbalancing valve 14 in the open position.

- The lines 23 being connected to the delivery ducts of
15 the rotary motors 2 through the respective distributors 6, if the pressure in one of these delivery ducts decreases because of pulling torques below the pressure value in the line 33, the corresponding non-return valve 35 opens to depressure the line 33.
20 Consequently, the counterbalancing valve 14 closes to a proportional extent, throttling the discharge flow from the motor subjected to pulling forces, so as to brake it and hence prevent its cavitation.

- By virtue of the non-return valves 35, when several
25 rotary motors 2 are simultaneously in these conditions, the counterbalancing valve 14 is closed even in this case by the lower pressure delivery line of the rotary motors 2.

This variant has the advantage over the embodiments

described previously with reference to Figures 1 and 2
of using ordinary non-return valves for the selection of
the lower pressure signal and of not requiring recourse
to by-pass lines for taking account of the inoperative
5 condition of one or more of the rotary motors 2.

CLAIMS

1. Hydraulic control circuit for working members of earth-moving machines, including a supply of pressurised hydraulic fluid and a plurality of hydraulic actuators, some linear and some rotary, for operating respective working members, each of which is associated with a respective spool-type hydraulic distributor which can be set, with continuous regulation, by respective pilot means in three positions corresponding to movement in a first direction, stoppage, and movement of the working member in a second direction opposite the first, and load-sensing pressure compensation means associated with the supply and the distributors for keeping the difference between the pressure supplied by the supply and the pressure of the working members substantially constant, and in which the rotary hydraulic actuators are associated with braking valve means piloted by the supply pressure of the rotary actuators and arranged to vary their discharge resistance as a function of the supply pressure, characterised in that the rotary hydraulic actuators (2) and their distributors (6) are grouped in a circuit separate from the linear hydraulic actuators (1) and have a common discharge line (15), and in that the braking valve means include a single normally-closed counterbalance valve (14) connected in the common discharge line (15), the opening of which is controlled by a pilot pressure signal corresponding to the lowest supply pressure for the rotary actuators (2).

2. Circuit according to Claim 1, characterised in that the pilot pressure signal for commanding the

opening of the counterbalance valve (14) is directed to it through a logic system of selector valves (20).

3. Circuit according to Claim 2, characterised in that the logic system of selector valves comprises a series of low-pass selector valves (20), each having two inlets (21) one of which is connected to the load-sensing pressure signal of the distributor (6) of one of the rotary actuators (6) or to the output (22) of the previous selector valve (20), the two inlets (21) of each of the selector valves (20) being connected by a communicating passage (24) provided with a calibrated choke (25).


4. Circuit according to Claim 2 or Claim 3, characterised in that the counterbalance valve (14) has associated recycling means (26; 28; 29) for directing a flow of fluid from the discharge line (15) to the delivery of the rotary actuators (2) when the counter-pressure generated by the counterbalance valve (14) is greater than the delivery pressure to the distributors (6).

5. Circuit according to Claim 4, characterised in that the recycling means include a non-return valve (26) located between the common discharge line (15) and the delivery of the rotary actuators (2).

6. Circuit according to Claim 1, characterised in that the pilot pressure signal for commanding the opening of the counterbalance valve (14) is directed to it from a supply of pressurized hydraulic fluid (9) through a depressurising unit (32) connected, in

parallel with the counterbalance valve (14), with the load-sensing pressure signals of the distributors (6) of the actuators (2) through respective non-return valves (33).

7. Circuit according to Claim 6, characterised in that the supply of pressurised hydraulic fluid is an auxiliary supply pump (9) for the servo-controls (7) for operating the distributors (5,6), the auxiliary pump being connected to the depressurising unit (32) through a calibrated orifice (36) and a non-return valve (37).

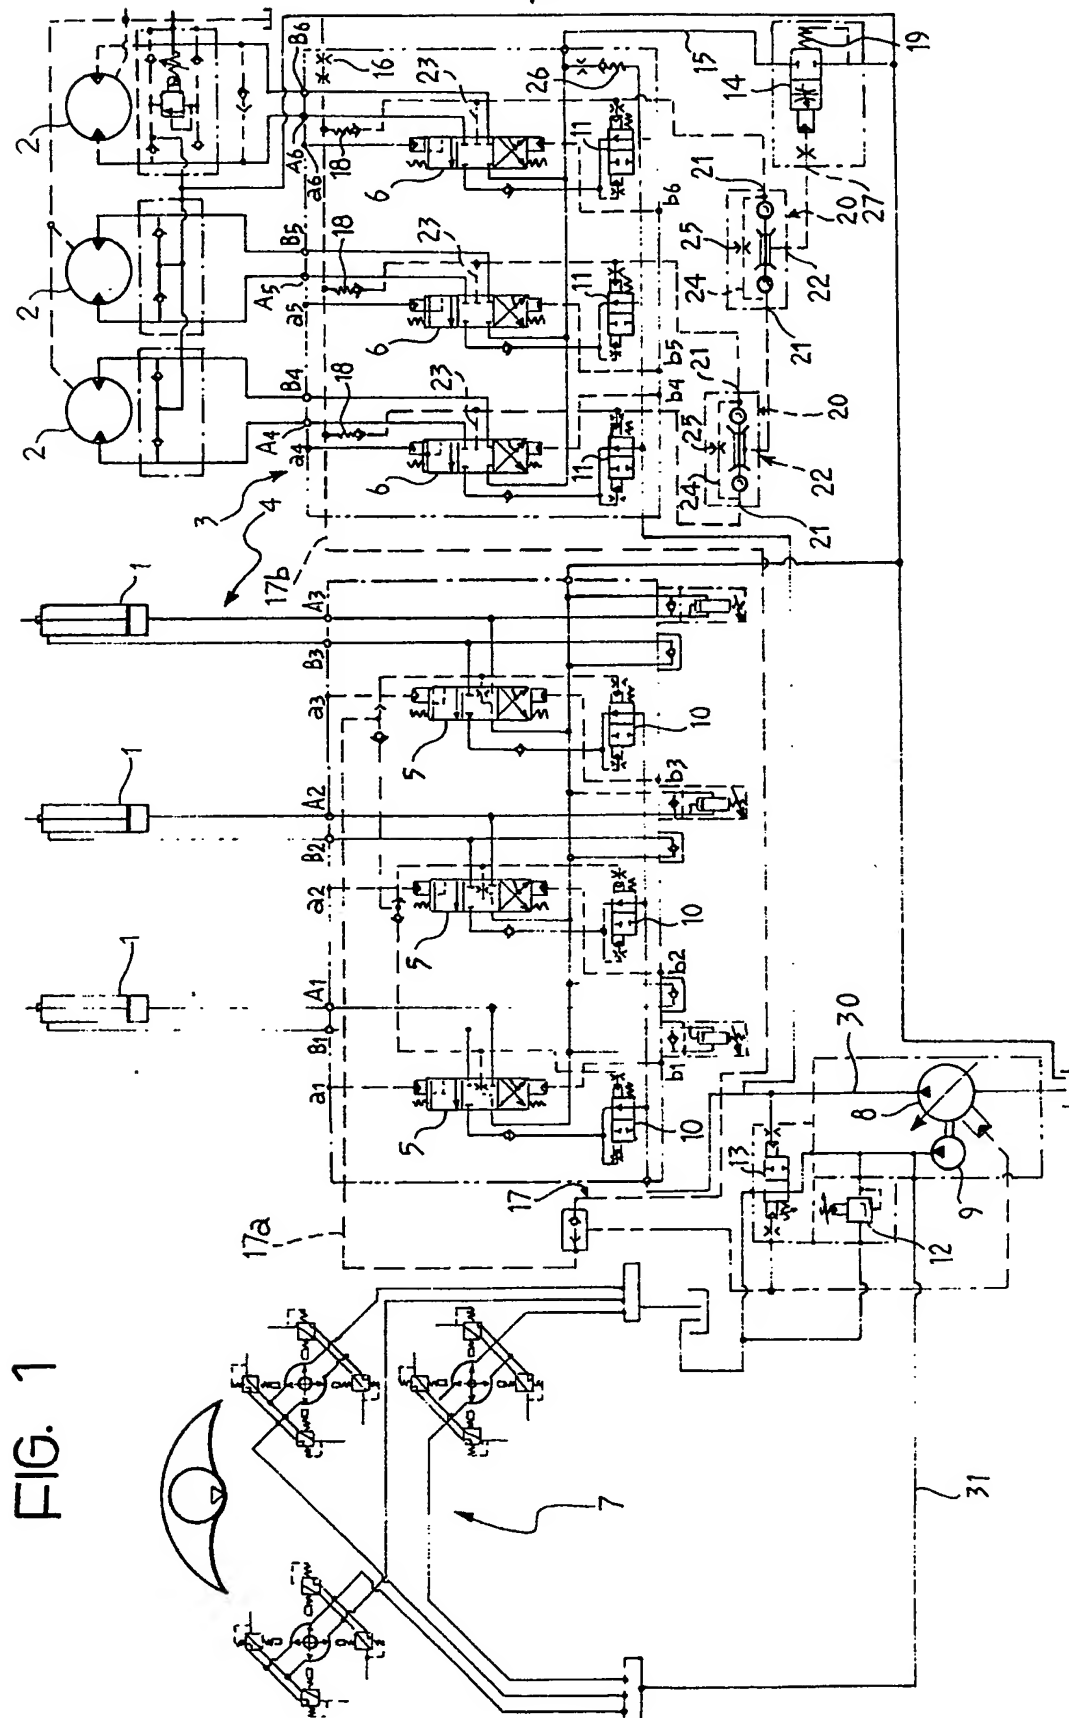


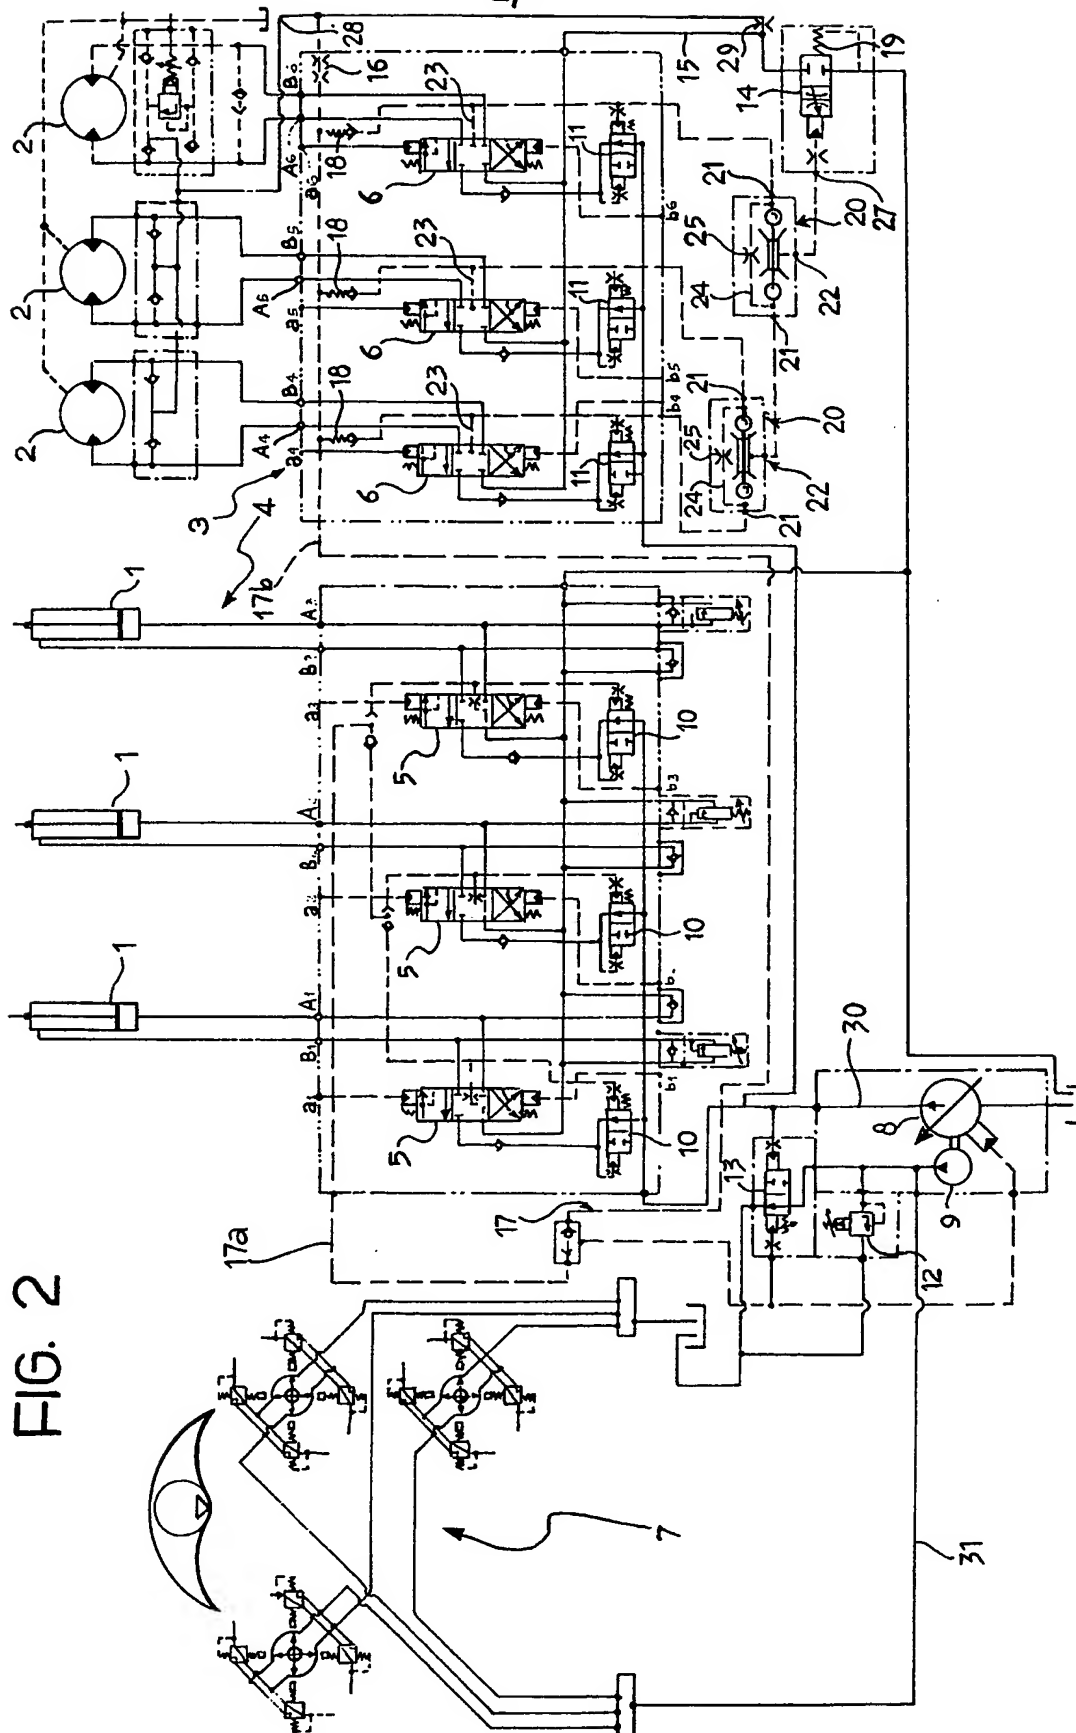


FIG. 3



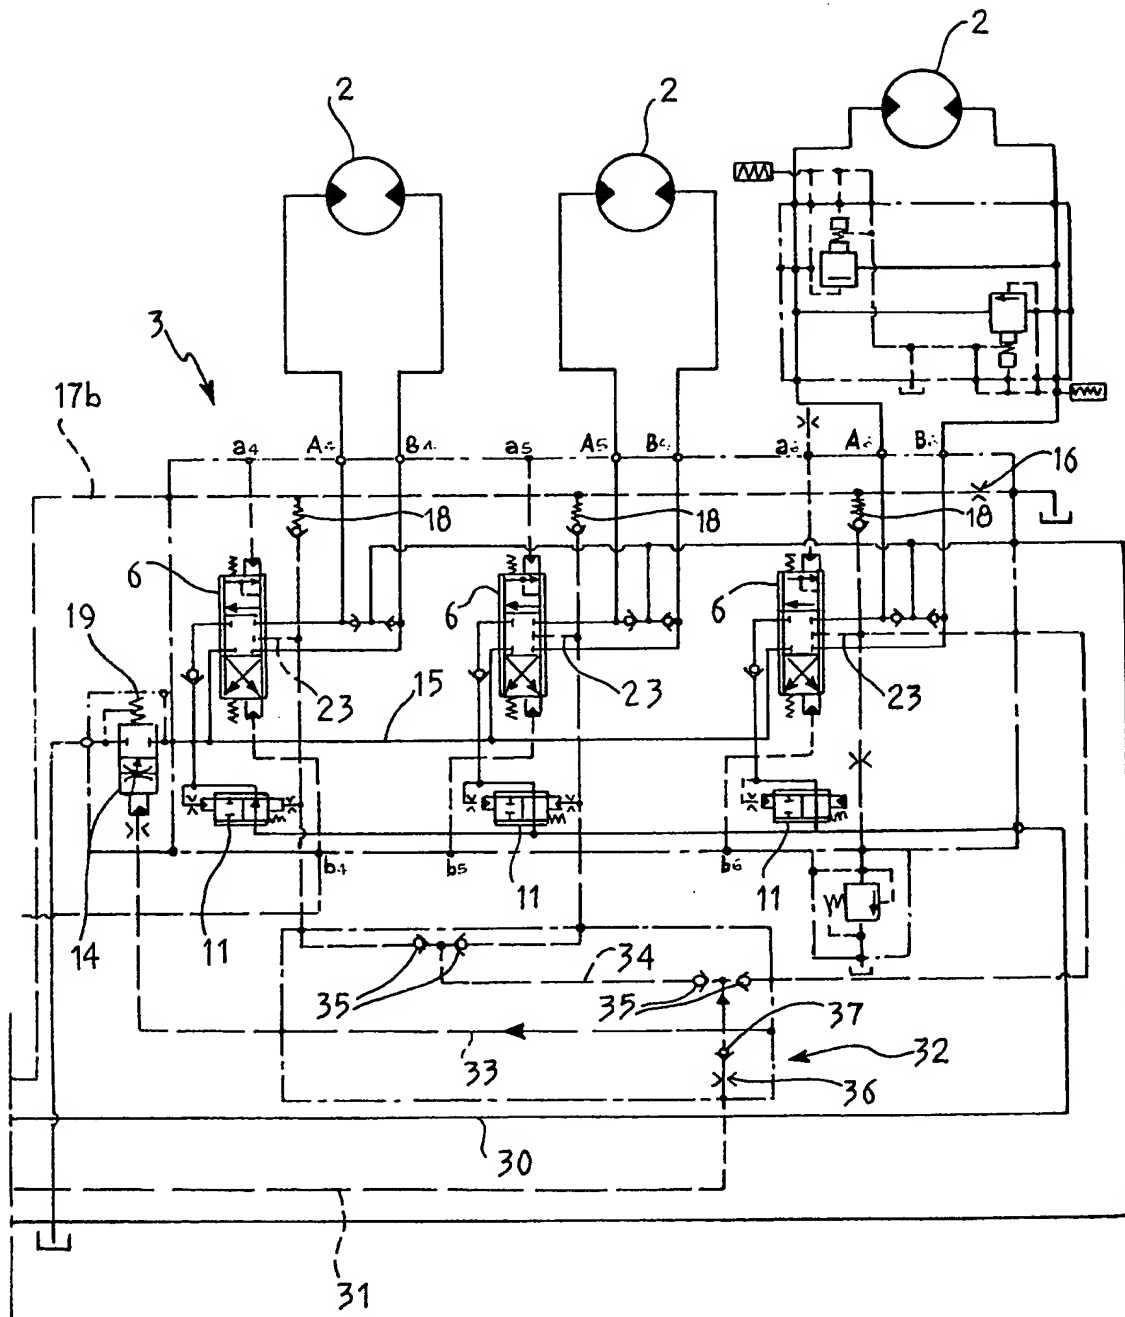

European Patent
Office

EUROPEAN SEARCH REPORT

0232683
Application number

EP 86 83 0260

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--|---|--|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int. Cl.4) |
| A | DE-A-3 346 973 (MATSUDA et al.) * Abstract; figure * | 1 | E 02 F 9/12 E 02 F 9/22 E 02 F 3/30 E 02 F 3/32 |
| A,D | EP-A-0 191 275 (P. THA et al.) * Whole document * | 1 | F 15 B 11/05 |
| A | FR-A-2 169 397 (H. WEYHAUSEN KG MASCHINENFABRIK) * Whole document * | 1 | |
| A | US-A-4 087 968 (BIANCHETTA) * Abstract; figure * | 1 | |
| A | GB-A-1 057 752 (ORENSTEIN-KOPPEL et al.) * Claims 1-5; figure * | 1 | |
| A | US-A-3 987 623 (BIANCHETTA) * Claims 1-12; figures 1-4 * | 1 | E 02 F F 15 B |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 07-05-1987 | Examiner ANGIUS P. |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p> | | | |

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.